

Features

- 19" TFT-LCD
- Intel Celeron Processor N2930
- SUS316 Stainless Steel
- Total IP66 Grade with M12 Waterproof Connector
- Variety of IO applications
- Wide range DC 9~36V Power Input
- Support Panel Mount & VESA Mount
- Support Projected Capacitive Touch
- Full Flat Bezel and Fanless Design
- ATEX Zone2, IECEx and C1D2 Certified



Specifications


System	
CPU	Intel Celeron Processor N2930
System Chipset	SoC
Memory	4GB DDR3L on board, 8GB for Option
IO Port	
Standard	1 x M12 8pin for LAN with Metal Waterproof CAP 1 x M12 8pin for COM1/RS-232/422/485 (Default RS-232) with Metal Waterproof CAP 1 x M12 8pin for 2 x USB 2.0 with Metal Waterproof CAP 1 x M16 3pin for DC Power with Metal Waterproof CAP
Optional	2 x optional blank M12 connectors with waterproof cap for selecting two from the following options: (1) 2 x M12 8pin for 2 x USB 3.0 (2) 2 x M12 8pin for 1 x USB 3.0 + 2 x USB 2.0 (3) 2 x M12 8pin for 1 x RS-232 + 2 x USB 2.0 (4) 2 x M12 8pin for 1 x USB 3.0 + 1 x RS-232 (5) 1 x M12 8pin for LAN + 1 x M12 12pin for VGA
Storage Space	
Storage	1 x 2.5" SATA HDD or SSD space 1 x Internal SD Card slot on board
Expansion	
Expansion Slot	1 x Mini PCIe Full size slot (Wifi module, mSATA SSD, Either One)

Display	Standard	High Brightness Optional
Display Type	19" Color TFT-LCD	19" Color TFT-LCD
Max. Resolution	1280 x 1024	1280 x 1024
Max. Color	16.7M	16.7M
Luminance (cd/m ²)	350	1000
View Angle	H: 170/ V:160	H: 170/ V:160
Contrast	1000:1	1000:1
Backlight Lifetime	50,000 hrs	50,000 hrs

Touch Screen	
Type	Projected Capacitive Touch
Interface	USB
Light Transmission(%)	90%

Power	
Power Input	DC 9~36 V
Power Consumption	MAX: 33.3 W

Dimensions

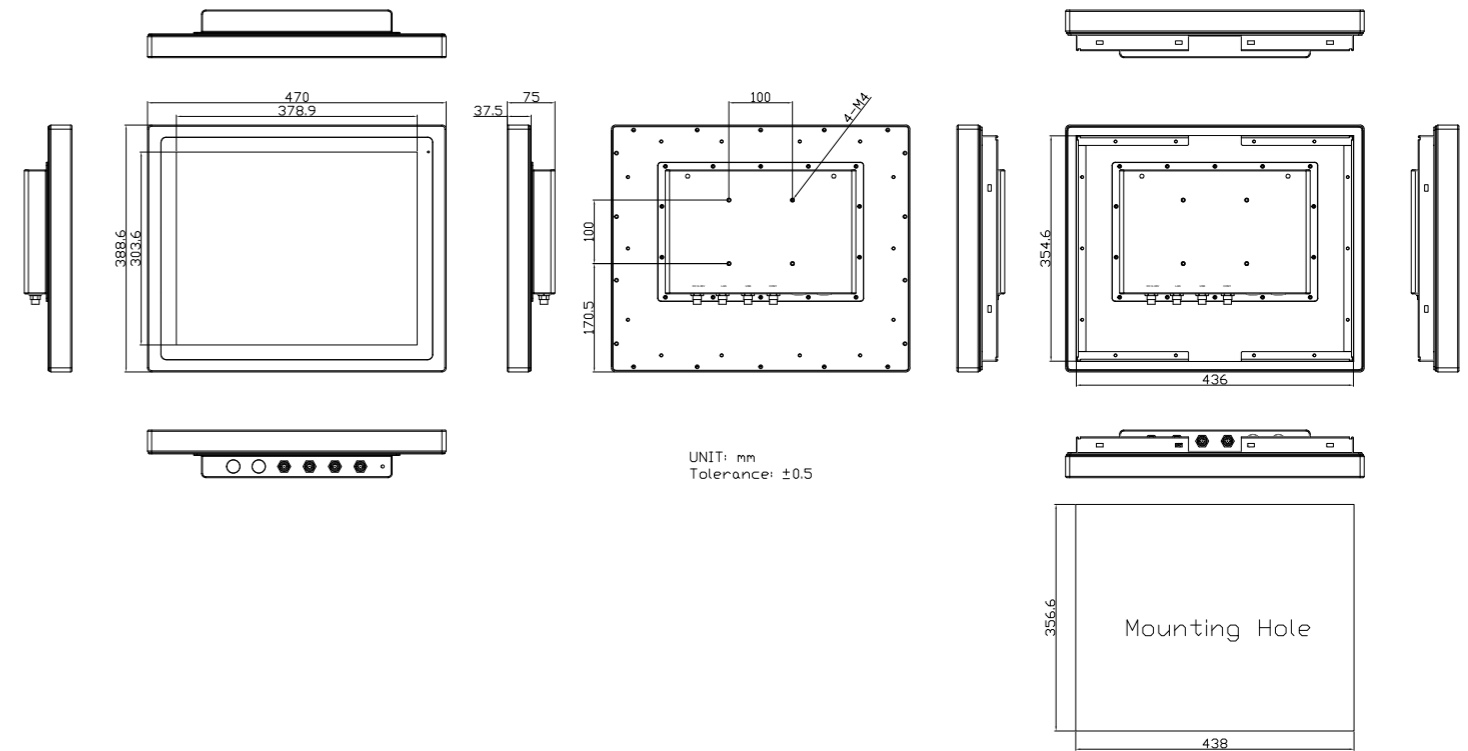

Mechanical	
Construction	316 Stainless Steel Chassis
Mounting	VESA Mount 100 x100 / Panel Mount
IP Rating	Total IP66 6 sides
Dimensions	470 x 388.6 x 75 mm
Net Weight	13 Kg

Environmental	
Operating Temperature	-20~60°C
Storage Temperature	-30~70°C
Storage Humidity	10 to 90% @ 40°C, non-condensing
Certificate	Meet CE / FCC Class A ATEX / IECEx / C1D2 Zone 2

Operating System Support	
Windows 7 Embedded Standard	
Windows Embedded Standard 7	
Windows® Embedded 8.1 Pro	
Windows® Embedded 8.1 Industry Pro	
Windows 10 IOT Enterprise LTSB 2016	