

XDE32-101WP50DVG1E

10.1 Inch Closed Frame Touch Monitor



Features

- P-Cap technology
- Polished appearance
- Easy integration and low maintenance
- Excellent performance, accuracy and reliability

Introduction


XDE32-101WP50DVG1E is a touchmonitor using industrial grade LED, with low power consumption, ultra-thin body design, high resolution display and excellent multi-touch interactive experience. Compared to the average consumer monitor, the XDE32-101 industrial-grade high performance and professional design is better suited for applications in industries such as retail, gaming, kiosk, self-service, finance, transit, conference.

Specifications

Name	10.1 Inch Closed Frame Touch Monitor	
Model	XDE32-101WP50DVG1E	
LCD Panel Parameters	Display Technology	Active Matrix TFT-LCD With LED Backlight
	Aspect Ratio	16:1
	Active Area (W x H)	216.96 x 135.60mm
	Native Resolution	1280 x 800@60Hz
	Response Time (Typ.)	25ms
	Display Colors	16.2million
	Luminance (Typ.)	500nits; with P-Cap 420nits
	Contrast Ratio (Typ.)	800:1
Viewing Angle (Typ.)	Horizontal (left/right) CR \geq 10 85°/85° Vertical (up/down) CR \geq 10 85°/85°	
Touch Screen Parameters	Touch Technology	Projected Capacitive (P-Cap)
	Surface Treatment	Tempered Strengthened Optional: Anti-Glare, Antimicrobial
	Active Area(W x H)	218.0 x 136.0 \pm 0.3mm
	Thickness(Total)	2.75 \pm 0.2mm
	Light Transmission	\geq 83%
	Response Time	8ms
	Touch Screen Interface	USB
Touch Point	10	
Overall Parameters	Case/Bezel Color	Black
	Mounting Options	VESA: 75 x 75 mm
	Outline Dimensions (W x H x D)	261.3mm x 179.3mm x 37.10mm
	Power Supply	External Adapter: 100-240V AC, 50-60 Hz Input Voltage Range: +12V _{DC} \pm 5%
	On Screen Display (OSD)	Control (back): Power, Auto, Up, Down, Menu
	Power Consumption	MAX: 15W
	Speaker	NA
	Webcam	NA
	Operating Altitude	\leq 3000m
	Temperature Range	Operating: 0 °C to 40 °C, storage: -20 °C to 60 °C
	Humidity (Non Condensing)	Operating: 20% to 80%, storage: 10% to 90%
	I/O	VGA, DVI, USB (Type B)
	Accessories	Cables: VGA x 1, USB x 1, 1.5m Length
	Carton Box Dimensions	440mm (W) x 370mm (H) x 170mm (D)
	Weight	Net: 5.2kg Gross: 7.6kg
	MTBF	50,000 hours demonstrated
Agency Approvals	CE, FCC	
Warranty	3 years	

Dimensions

Unit: mm

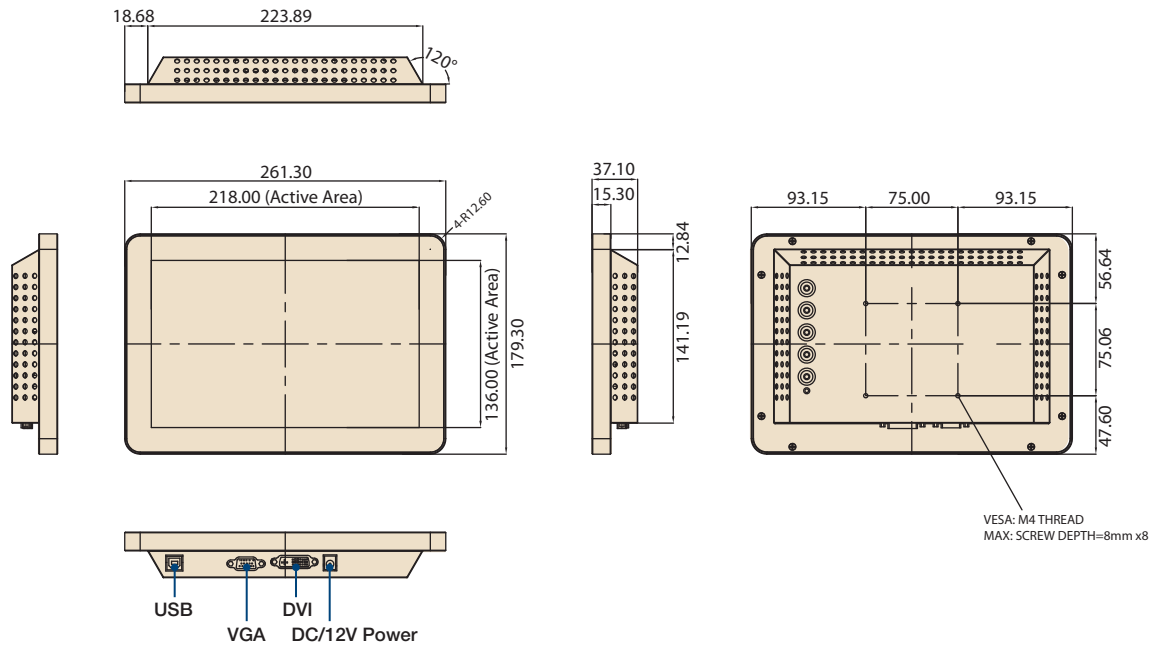

Ordering Information

Model	Description
XDE32-101WP50DVGES - Sample to 49 units.	10.1", 16:10, 500nits, P-Cap, USB, VGA & DVI, Black
XDE32-101WP50DVG1E - MOQ 50+ units.	10.1", 16:10, 500nits, P-Cap, USB, VGA & DVI, Black

Optional Accessories

Model	Description	
Adaptor	12V/3.33A, DC Cable: 1500mm, DC Jet Ø2.5mm	
DVI Cord	1500mm	
Power Cord	UK	1500mm
	EU	
	US	