



**Features**

- 21.5" TFT-LCD
- Intel 6th Gen. Core i5/i3 Processors
- SUS316 Stainless Steel
- Total IP66 Grade with M12 Waterproof Connector
- Variety of IO applications
- Wide range DC 9~36V Power Input
- Support Panel Mount & VESA Mount
- Support Projected Capacitive Touch
- Full Flat Bezel and Fanless Design
- ATEX Zone2, IECEx and C1D2 Certified



**Specifications**

System	
CPU	Intel 6th Gen. Core i5-6300U/i3-6100U
System Chipset	SoC
Memory	1 x 260-pin SO-DIMM DDR4 2400MHz, up to 16GB

IO Port	
Standard	1 x M12 8pin for LAN with Metal Waterproof CAP 1 x M12 8pin for COM1/RS-232/422/485 (Default RS-232) with Metal Waterproof CAP 1 x M12 8pin for 2 x USB 2.0 with Metal Waterproof CAP 1 x M16 3pin for DC Power with Metal Waterproof CAP
Optional	2 x optional blank M12 connectors with waterproof cap for selecting two from the following options: (1) 2 x M12 8pin for 2 x USB 3.0 (2) 2 x M12 8pin for 1 x USB 3.0 + 2 x USB 2.0 (3) 2 x M12 8pin for 1 x RS-232 + 2 x USB 2.0 (4) 2 x M12 8pin for 1 x USB 3.0 + 1 x RS-232 (5) 1 x M12 8pin for LAN + 1 x M12 12pin for VGA

Storage Space	
Storage	1 x 2.5" SATA HDD or SSD space


Expansion	
Expansion Slot	1 x Mini PCIe Full size slot (Wifi module, mSATA SSD, Either One)

Display	
Display Type	21.5" Color TFT-LCD
Max. Resolution	1920 x 1080
Max. Color	16.7M
Luminance (cd/m <sup>2</sup> )	300
View Angle	H: 178/ V:178
Contrast	5000:1
Backlight Lifetime	50,000 hrs

Touch Screen	
Type	Projected Capacitive Touch
Interface	USB
Light Transmission(%)	90%

Power	
Power Input	DC 9~36 V
Power Consumption	MAX: 52 W

**Dimensions**

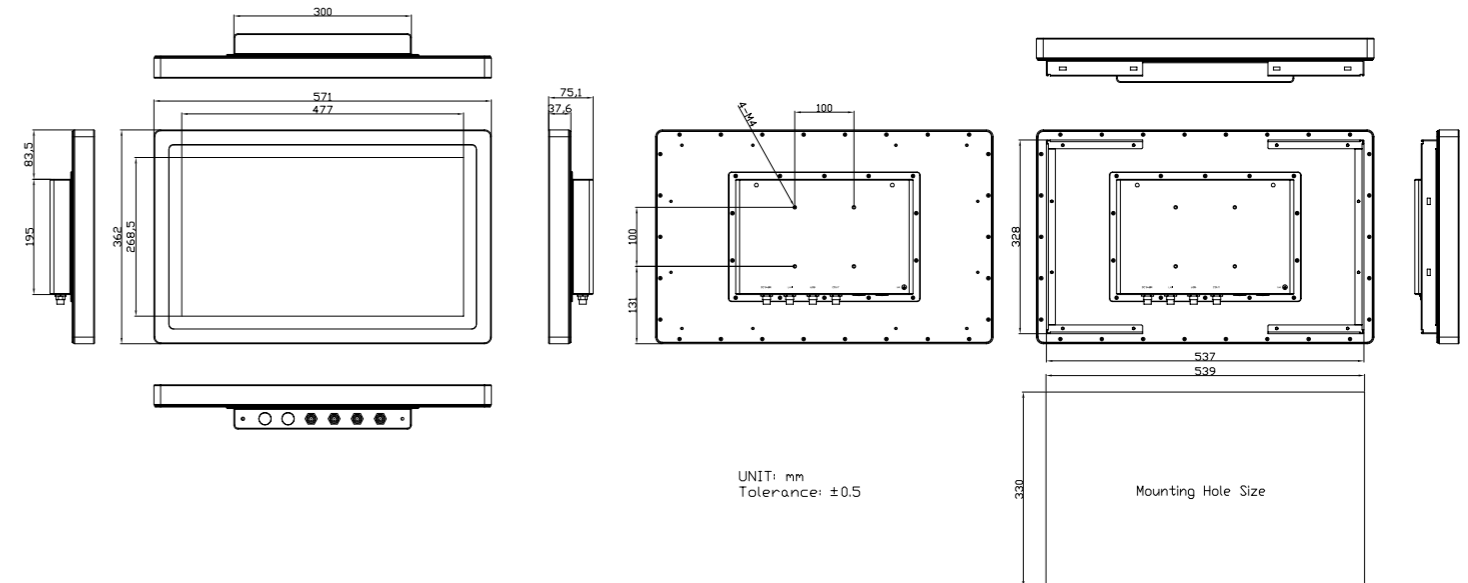

Mechanical	
Construction	316 Stainless Steel Chassis
Mounting	VESA Mount 100 x100 / Panel Mount
IP Rating	Total IP66 6 sides
Dimensions	571 x 362 x 75.1 mm
Net Weight	12.6 Kg

Environmental	
Operating Temperature	-20~60°C
Storage Temperature	-30~70°C
Storage Humidity	10 to 90%@ 40°C, non-condensing
Certificate	Meet CE / FCC Class A ATEX / IECEx / C1D2 Zone 2

Operating System Support	
Windows 7 Embedded Standard	
Windows Embedded Standard 7	
Windows® Embedded 8.1 Pro	
Windows® Embedded 8.1 Industry Pro	
Windows 10 IOT Enterprise LTSC 2016	