

XDE32-430WP50HIG1E

43 Inch Closed Frame Touch Monitor



Features

- P-Cap technology
- Sleek appearance
- Easy integration and low maintenance
- Excellent performance, accuracy and reliability

Introduction


XDE32-430WP50HIG1E is a LED industrial Touchmonitor, with low power consumption, ultra-thin body design, high resolution display and excellent multi-touch interactive experience. Compared to the average consumer monitor, the XDE32-430 industrial-grade high performance and professional design is better suited for applications in industries such as retail, gaming, kiosk, self-service, finance, transport, conference, education and healthcare.

Specifications

Name	43 Inch Closed Frame Touch Monitor	
Model	XDE32-430WP50HIG1E	
LCD Panel Parameters	Display Technology	Active Matrix TFT-LCD With LED Backlight
	Aspect Ratio	16:9
	Active Area (W x H)	940.9 x 529.25mm
	Native Resolution	1920 x 1080 @ 60Hz
	Response Time (Typ.)	8ms
	Display Colors	16.7million
	Luminance (Typ.)	400nits; with P-Cap 340nits
	Contrast Ratio (Typ.)	1200:1
Viewing Angle (Typ.)	Horizontal (left/right) CR \geq 10 89°/89° Vertical (up/down) CR \geq 10 89°/89°	
Touch Screen Parameters	Touch Technology	Projected Capacitive (P-Cap)
	Surface Treatment	Chemically Strengthened Optional: Anti-Glare
	Active Area(W x H)	941.18 x 529.42 \pm 0.5mm
	Thickness(Total)	4.8 \pm 0.3mm
	Light Transmission	\geq 83%
	Response Time	10ms
	Touch Screen Interface	USB
Touch Point	10	
Overall Parameters	Case/Bezel Color	Gray
	Mounting Options	VESA: 400 x 200 mm
	Outline Dimensions (W x H x D)	1021.0mm x 608.7mm x 54.2mm
	Power Supply	Input Voltage Range: 100-240V AC, 50-60 Hz
	On Screen Display (OSD)	Control (Back): Power, Auto, Up, Down, Menu
	Power Consumption	MAX: 80W
	Speaker	NA
	Webcam	NA
	Operating Altitude	\leq 3000m
	Temperature Range	Operating: 0 °C to 40 °C, storage: -20 °C to 60 °C
	Humidity (Non Condensing)	Operating: 20% to 80%, storage: 10% to 90%
	I/O	VGA, HDMI, DVI, DP, USB (Type B)
	Accessories	Cables: VGA x 1, USB x 1, 1.5m Length
	Carton Box Dimensions	1190mm (L) x 240mm (W) x 780mm (H)
	Weight	Net: 17.6kg Gross: 25.5kg
MTBF	50,000 hours demonstrated	
Agency Approvals	CE, FCC	
Warranty	3 years	

Dimensions

Unit: mm

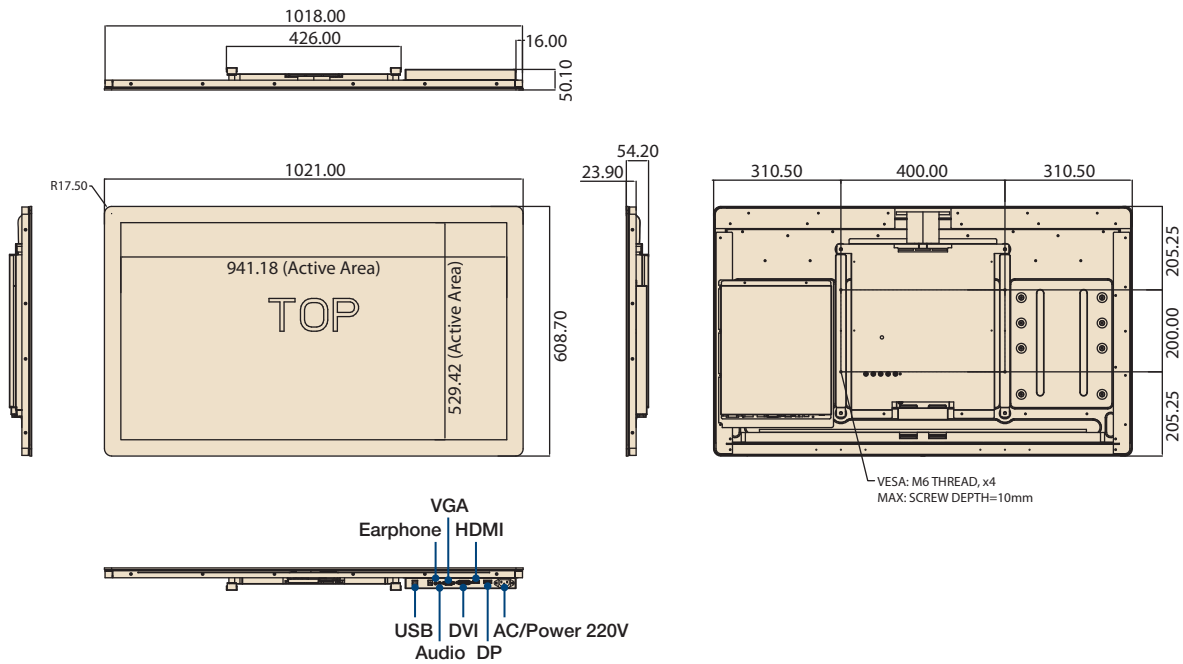

Ordering Information

Model	Description
XDE32-430WP40HIGES - Sample to 49 units	43", 16:9, 400nits, P-Cap, USB, VGA, DVI& HDMI & DP, Gray
XDE32-430WP50HIG1E - MOQ 50+ units	43", 16:9, 400nits, P-Cap, USB, VGA, DVI& HDMI & DP, Gray

Contact sales for other options

Optional Accessories

Model	Description	
Power Cord	UK	1500mm
	EU	
	US	
HDMI Cord	1500mm	
DP Cord	1500mm	